

HANLU MACHINERY



CE ISO 9001



温州汉鹿机械有限公司
Wenzhou Hanlu Machinery Co.,Ltd

50 Dongfang South Road, Ouhai Economic Development Zone,
Wenzhou, Zhejiang Province, China
Mobile/whatsapp/wechat: +86-18605778321

代理商 (Agent)

[汉鹿机械]

Wenzhou HANLU Machinery Co.,Ltd



ISO9001 CERTIFICATION


AUTOMATIC SLEEVE WRAPPER + PE FILM SHRINK TUNNEL

袖口式全自動包裝機+PE熱收縮包裝機



QSJ-5040A(SLEEVE WRAPPER)+ BSE-5040A(TUNNEL)

Diagram Of Operation:



- ◆ The up and down magnetic switch control system prevents mistakes whilst sealing and it protects the operator.
- ◆ The "Omron" programmable logic controller (PLC) allows for stable performance.
- ◆ The "Schneider" AC contactor allows for intelligent temperature control.
- ◆ The large power conveyor motor as well as a stepless speed regulator ensures smooth feeding.
- ◆ The up and down large power fan system ensures excellent shrinkage time, every time.
- ◆ The super cooling system ensures the perfect shape of finished products after shrinking.

● Specification技術參數


Model/ 型號	QSJ-5040A
Voltage/電源電壓	3Phase 220V/380V, 50-60HZ
Power/功率	3KW
Capacity/包裝速度	0-8 Packing/minute
Air source supply/工作氣壓	250L/min 0.4-0.6Mpa
Width/thickness of the film/膜寬/厚度	Max590mm/0.03-0.25mm
Sealing length of sealing bar/封切刀頭長度	600mm
Max.packing dimension/最大包裝尺寸	380(L)×270(W)×350(H)mm
Min.packing dimension/最小包裝尺寸	250(L)×50(W)×100(H)mm
Machine size/機器外型尺寸	1160×1600×1930mm
Conveyor driver size /輸送臺尺寸	900 (L) × 306(W) × 800(H)mm 1700(L) × 306(W) × 800(H)mm
Machine weight/機器重量	370KGS
Shrink film/收縮膜	PE,POF,PVC,PP

NO. 01



ISO9001 CERTIFICATION

AUTOMATIC SLEEVE WRAPPER + PE FILM SHRINK TUNNEL

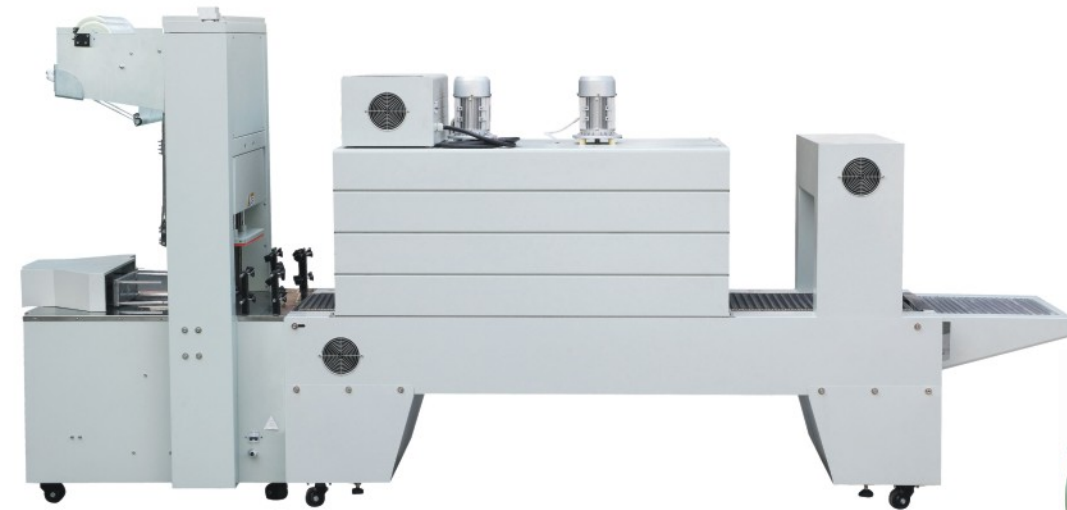BZJ5038B(SEMI-AUTO SLEEVE WRAPPER)+BSE5040A(TUNNEL)
袖口式半自動包裝機+PE熱收縮包裝機

DQX6040S Automatic sleeve wrapper & DSE8060A PE Shrink Tunnel



● Specification技術參數

Model	BZJ-5038B (Pneumatic)	DQX6040S
Voltage	220~240V, 50-60HZ	
Power	1.8KW	2.0KW
Capacity	0-6 Packing/minute	0-12m/min
Max . packing dimension	450x270x330mm	L ≥ 120, W ≤ 600, H ≤ 420mm
Min . packing dimension	250x60x140mm	120x120x80mm
Air source supply	170L/min 0.3-0.5Mpa	250L/min 0.4-0.6Mpa
Width /thickness of the film	Max . 530mm /0.03-0.25mm	Max . 650mm /0.03-0.25mm
Machine size	1020×830×1980mm	1952x1155x1846mm
Weight/	225 KGS	320KGS
Shrink film	PE	

● Tunnel:

Model	BSE5040A	BSE8060A
Power supply	3phase 220V, 380-460V 50-60HZ	
Heater power	21.30KW Adjuster	43.6KW Adjuster
Conveyor speed	0-10m/minute	
Tunnel size(L*W*H)	1500x500x460mm	2000x800x600mm
Conveyor loading	30KGS MAX	
Machine size (mm)	2500x820x1680	3440x1140x1850
Machine weight	470KG	600KG
Shrink film	PE,POF,PVC,PP	

NO. 02



ISO9001 CERTIFICATION

AUTOMATIC L - TYPE SEALING MACHINE SERIES

全自動L型封切包裝機系列




DQL5545S Automatic L sealer & DSD4520 Shrink tunnel
DQL5545S全自動L型封切機&DSD4520熱收縮包裝機



DQL5545SG High Speed Automatic L sealer & DSC4525L Shrink Tunnel
DQL5545SG 高速自動L型封切機 & DSC4525L熱收縮包裝機

We can customize non-standard machines according to customer requirements.

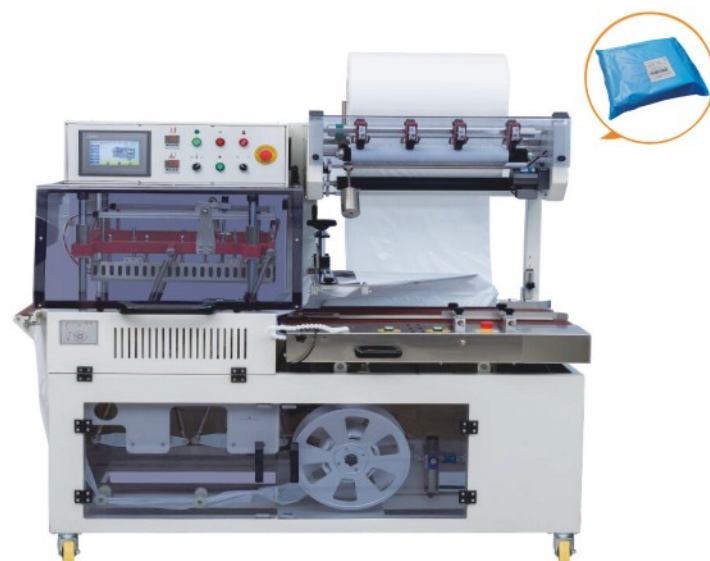

DQL5545PEG High Speed Automatic L Sealer For PE express bags
高速自動L型封切機（適用PE快遞袋）



DQL6560PEG High Speed Automatic L Sealer For PE express bags
高速自動L型封切機（適用PE快遞袋）

• Specification技術參數

Model	DQL5545S	DQL5545SG	DQL6560SG	DQL5545PEG	DQL6560PEG
Power	220V 50/60Hz 2.2kw				
Max packing size	L+2H≤550, W+H≤350, H≤140(mm)		L+2H≤650, W+H≤500, H≤140mm	L+2H≤550, W+H≤350, H≤140mm	L+2H≤650mm, W+H≤550mm, H≤220mm
Capacity	0-30pcs/min	0-40pcs/min	0-30 pcs/min	0-30 pcs/min	0-30 pcs/min
Sealing temperature	140℃-180℃			115℃-150℃	115℃-150℃
Thickness of film	0.015-0.10 (mm)			0.03-0.06 (mm)	
Packing material	POF			PE	
Machine weight	320KGS		350KGS	320KGS	1100KGS
Machine size(mm)	1760x900x1580		2064x1650x1330	1760x940x1580	2064x1650x1330

• Tunnel:

Model	DSD4520	DSC4525L
Power source	220V/380V 50-60Hz	
Power	12.8 KW	13.2KW
Conveyor speed	0-16m/min	
Tunnel size (mm)	1200x450x200	1500x450x250
Conveyor loading	10kg	
Machine size (mm)	1600x720x1400	1800x700x1300



ISO9001 CERTIFICATION

AUTOMATIC SIDE SEALER SERIES

全自動邊封封切包裝機系列



DQL4518S High Speed Automatic Side Sealer & DSC4525L Shrink Tunnel
DQL4518S 高速自動邊封封切機+ DSC4525L熱收縮包裝機



DQL6025S Automatic Side Sealer & DSC6030A Shrink Tunnel
DQL6025S 全自動邊封封切機+DSC6030A熱收縮包裝機

• Specification技術參數

Model	DQL4518S
Power	220V 50/60Hz 2.5kw
Max packing size	L: ∞, W≤380, H≤160 (mm)
Capacity	0-35pcs/min
Sealing temperature	Horizontal sealing bar: 150℃-200℃ Side sealing bar: 300℃-380℃
Thickness of film	0.015-0.05 (mm)
Packing material	POF
Machine weight	350 (kg)
Machine size	1800x950x1580mm

• Specification技術參數

Model	DQL6025S
Power	220V 50/60Hz 3.0kw
Max packing size	L: ∞, W+H≤600, H≤220 (mm)
Capacity	0-25pcs/min
Sealing temperature	Horizontal sealing bar: 150℃-200℃ Side sealing bar: 300℃-380℃
Thickness of film	0.015-0.05 (mm)
Packing material	POF
Machine weight	450 (kg)
Machine size	2600x1450x1680mm



ZSJ-590P Automatic pillow packing machine

BS-590P Shrinking Tunnel

• Specification技術參數

Model	Power	Capacity	Packing size	Max. width of film	Weight	Machine size
ZSJ-590P	3.6kw (packer) +16.5kw (tunnel)	30-150bag/min	L180-530 W30-200 H50-130mm	<590mm	900kg (packer) +500kg (tunnel)	7500x1105x1750mm (packer) 2400x600x1700mm (tunnel)



ISO9001 CERTIFICATION

L-TYPE SEALING MACHINE SERIES


L型封切包裝機系列



BS-A450 Shrink tunnel & DFQA450 Semi-auto L Sealer
BS-A450 熱收縮包裝機 + DFQA450 半自動L型封切機



BS-A450 Shrink tunnel & DFQC450 Pneumatic L Sealer
BS-A450 熱收縮包裝機 + DFQC450 氣動L型封切機

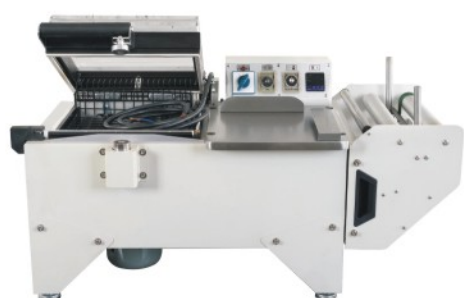

DFM3320 2 In 1 Shrink packager
二合一熱收縮包裝機



FM400 2 In 1 Shrink packager
二合一熱收縮包裝機



FQL450B Manual L-type sealer
手動L型封切機



DFM5540 2 In 1 Shrink packager
二合一熱收縮包裝機



DFS450 Continuous seal-cut-shrink combined machine
連續式封切熱收縮包裝機

● Specification 技術參數

Model	DFQA450	FQL450B	DFQC450	DFM3320	DFM5540	FM400	DFS450
Power source	220V/Single phase/50-60Hz			380V/3phase/50-60Hz	220V/Single phase/50-60Hz		380V/3phase/50-60Hz
Heater power	1.0KW	0.80KW	1.0KW	2.57KW	3.8KW	4.5KW	12.12kw
Capacity(Pack/hour)	400-600			150-250	150-250	400-600	
Max sealing size(L*W)	550x450mm (Max. size For Packed Object: L+H≤550mm, W+H≤450mm)			L:300xW:200	L:550 x W:400	L:400 x W:400	L450xW500mm
Machine size(L*W*H)	1720x740x1050mm	1050x700x1170mm	1600x700x1170mm	1017x502x512mm	1400x730x1450mm	1050x740x1340mm	2000x1225x1280mm
Machine weight	116kg	55kg	128kg	68kg	128kg	168kg	228kg
Film material	POF,PVC						

NO. 05



ISO9001 CERTIFICATION

BS SERIES THERMAL SHRINK TUNNEL

熱收縮包裝機系列



DS3015 Thermal Shrink Packaging Machine
DS3015 熱收縮包裝機



DSH4020S Thermal Shrink Packaging Machine
熱收縮包裝機



DSA4020 Thermal Shrink Packaging Machine
熱收縮包裝機



BS-G450 Thermal Shrink Packaging Machine
熱收縮包裝機



BS-A450 Thermal Shrink Packaging Machine
熱收縮包裝機



DSA4525 Thermal Shrink Packaging Machine
熱收縮包裝機



DSD4520 Thermal shrink tunnel
熱收縮包裝機



DSC4525L Shrink Tunnel
熱收縮包裝機

We can make modifications to the size of the shrink unit according to customer's requirements.

● Specification 技術參數

Model	BS3015	DSH4020S	DSA4020	BS-G450	BS-A450	DSA4525	DSD4520	DSC4525L
Voltage	220V/380V,50/60Hz							
Power	4.5kw	6.9kw	7.6kw	7.5kw	9kw	8.6kw	12.8kw	11.70kw
Conveyor speed	0-12m/min							
Tunnel size (mm)	800x300x150	780x400x200	800x400x200	1200×450×250	830×450×250	1000x450x250	1200x450x200	1500x450x250
Heater type	Quartz heater	Quartz heater	Steel heater	Steel heater	Steel heater	Steel heater	Steel heater	Steel heater
Heater size & Quatity	630mmx7	630mm x 11	540mm x 10	1050mm x 6	370mm x 15	630mm x 10	900mm x 10	Round heater x 6
Conveyor loading	5 kg				10kg	5 kg	10kg	10kg
Machine size(mm)	1100x500x550	990x570x700	1060x620x815	1600×700×1300	1200×650×1300	1260x670x1290	1600x719x1440	1800x703x1260

NO. 06



ISO9001 CERTIFICATION


BSE SERIES PE FILM SHRINK PACKAGING MACHINE

BSE系列PE膜熱收縮包裝機

BSE4535/BSE5038/BSE6040
PE Film shrink packaging machine
PE膜熱收縮包裝機

- ◆Works with all kinds of shrink film;
- ◆Digital temperature controller
- ◆Top & bottom & side heating
- ◆Variable speed belt conveyor
- ◆Roller or Net conveyor belt, options
- ◆適用於所有類型的熱收縮膜
- ◆智能溫控儀
- ◆全方位熱收縮
- ◆大功率輸送電機，無級調速
- ◆輸送鏈條或網帶可選

- ◆Large power double fan motor, assure enough circulate wind
- ◆Reinforced conveyor motor to ensure steady transport
- ◆Super-strong cooling system to ensure perfect shape after heat-shrinking.
- ◆Solid conveyor rollers coated with silica gel to bear heavy objects and minimize damage and wear
- ◆Digital temperature controller
- ◆大功率雙運風電機，保證足夠的循環風量
- ◆加強型運送電機，確保輸送平穩
- ◆超強型冷卻系統，確保收縮完美
- ◆選用實心滾軸，外部套硅膠，能承受較大重量的物體且不易磨損

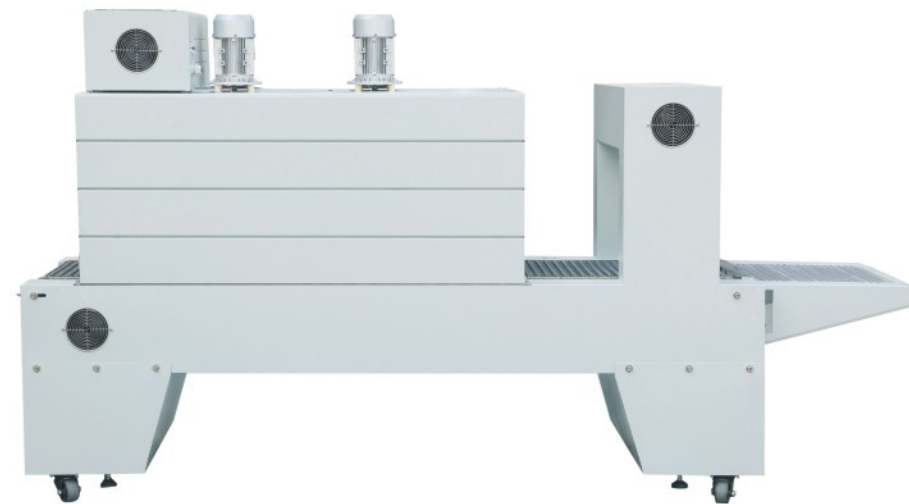BSE5040A/BSE6040A
PE Film shrink packaging machine
(Hotair circulation, Jet model)
PE膜熱收縮包裝機

● Specification技術參數

Model	BSE4535	BSE5038	BSE6040	BSE5040A	BSE6040A
Power supply	3Phase 220V,380-460V/50-60HZ				
Heater Power	20KW Adjustable	20KW Adjustable	26KW Adjustable	20KW	28KW
ConveyorSpeed	0-10m/min.	0-10m/min.	0-10m/min.	0-10m/min.	0-10m/min.
Tunnel size	1200x450x350mm	1200x500x380mm	1800x600x400mm	1500x500x460mm	1500x600x460mm
Heater type	Quartz heater				
Heater size & Quatity	370mm x 34			1200mm x 12	
Conveyor loading	25KG,Max.	25KG,Max.	25KG,Max.	30KG,Max.	30KG,Max.
Machine weight	220KGS	250KGS	285KGS	470KGS	500KGS
Machine size	2200x730x1440mm	2200x780x1470mm	2800x880x1570mm	2500x820x1680mm	2500x920x1680mm
Shrink film	PE,POF,PVC,PP				



ISO9001 CERTIFICATION


LABEL SHRINK PACKAGER SERIES

標籤熱收縮包裝機系列

BSS-1538B Label shrink packager
標籤熱收縮包裝機BSS-1538C Label shrink packager
標籤熱收縮包裝機BSS-1538D Label shrink packager
標籤熱收縮包裝機

本系列標籤熱收縮包裝機主要是針對瓶狀、罐狀、桶狀、杯狀產品的標籤收縮，可以收縮瓶口、瓶身、瓶底以及整體，適用於食品、藥品、化妝品、農藥等行業的玻璃瓶、塑料瓶、紙杯等容器的標籤收縮，其中BBS-1538C標籤熱收縮包裝機祇針對瓶口的收縮；

This series label shrink machines are mainly used to shrink label of product in bottle shape, can shape or barrel shape with glass bottle, plastic bottle or paper cup. The label either on the top, in the middle, at bottom of bottle or wrapping the whole bottle is able to be shrank with different type model. It is widely applied in the industry of food, medicine, cosmetic and pesticide, etc. In it, BSS-1538C label shrink machine is only to shrink label on the top of bottle.

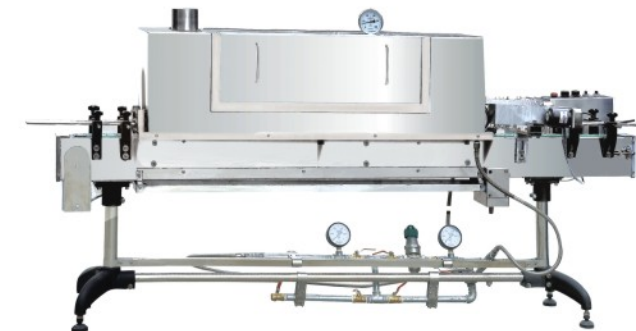DZBS1135 Steam label shrink machine
蒸汽標籤收縮機ZBS83A Steam label shrink machine
蒸汽標籤收縮機Steam Generator
蒸汽爐 (POWER:12/24KW)

● Specification技術參數

Model/型號	BSS-1538B	BSS-1538C	BSS-1538D	DZBS1135	ZBS83A
Voltage /電源電壓	220V/50-60HZ	220V/50-60HZ	220V/50-60HZ	220V/50-60HZ	220V/50-60HZ
Power/ 功率	8KW	6KW	6KW	150W	150W
Tunnel size/爐道尺寸(LxWxH) mm	1000x150x380	1000x150x150	800x200x400	1000x110x350	1350x180x380
Max.Packing size/最大包裝尺寸(mm)	Φ105x 350H	Φ105x 350H	Φ160x 350H	Φ80X300	Φ120x 350H
Conveyor motor/輸送電機	AC90W/220V	AC90W/220V	DC50W/220V	AC120W	AC120W
Conveyor speed/輸送速度	0-10m/min				
Max.loading /輸送載荷	15KGS				
Shrink film/適用收縮膜	POF,PVC,PP				
Weight/機器重量	96KGS	90KGS	66KGS	68KGS	150KGS
Dimension/外型尺寸(mm)	1500x350x1500	1500x350x1500	1500x400x1620	1520x400x1250	2400x430x1350



ISO9001 CERTIFICATION

CARTON STRAPPING & AUTOMATIC WRAPPING MACHINE

KZ900 High Desk Strapping Machine
高臺半自動捆扎機KZ900L Low Desk Strapping Machine
低臺半自動捆扎機

• Specification 技術參數

Model	KZ900	KZ900L
Strapping speed	1.6 Second/strap	
Strapping band width	9-15mm	
Strapping band thickness	0.7-1.1mm	
Power	220V 250W	
Weight	90kg	90kg
Size(LxWxH) mm	895x565x735	895x565x580

• Specification 技術參數

Model	DBC800	DBC800S
Power	120W,110/220V 50/60Hz	
Wrapping speed	30r/min	
Max.wrapping size	900x900x900mm	
Max.loading weight	30Kgs	
Paper roller diameter	3"	
Wrapping film	LLDPE	
Film thickness	17-35um	
Machine size (mm)	1150x600x1861	1150x600x2347

DBC800 Semi-auto stretch film
wrapping machineDBC800S Semi-auto stretch film
wrapping machine

- * PLC control
- *Photo-eye auto-height sensing pallet height
- *Pre-stretch device feeding film automatically
- *pre-stretch can reach 250%, reduce film consumption
- *Separate top, bottom & up-down Wrap Counter options
- *Film Tension Control adjustment on the panel
- *Variable Turntable Speed; Carriage up/down speed control
- *Manual/automatic exchangeable

• Specification 技術參數

Model	TP1650F
Wrapping Size (mm)	L500-1100mm*W500-1200mm
Turntable diameter	Φ1650mm (Φ1500mm/Φ1800mm)
Turntable height	85mm
Turntable speed	1-12rpm
Turntable loading weight	2000kg
Wrapping height	500-2000mm
Stretch system	250-400% pre-stretch rate
Power supply	220V 1.5kw
Machine weight	700kgs
Optional	Ramp/top plate/2400-3000mm height/3tons

TP1650CS automatic pallet wrapping machine (Top plate)
自動薄膜纏繞膜機 (壓頂)TP1650F automatic pallet wrapping machine (pre-stretch)
自動薄膜纏繞膜機 (預拉伸)

ISO9001 CERTIFICATION

SMART COURIER BAG PACKAGER

DFD40T Table type Courier Bag Packing Machine
DFD40TI Table type Courier Bag Packing Machine with labelingDFD40 Smart Courier Bag Packing Machine
DFD40I Smart Courier Bag Packing Machine with labeling

Automatic bag opening, automatic labeling, and bag sealing are completed at one time,
requiring only one person to operate, saving labor, high efficiency, and fast packaging.

- ◆ Easy to operate
- ◆ High-speed sealing
- ◆ Automatic labeling

• Specification 技術參數

Model No.	DFD40T/ DFD40TI	DFD40/ DFD40I
power input	AC 220V, 50-60HZ.	
Product power	900W	
Air consumption	0.5~0.6MPA, 30L/min.	
Packing material	PE roll bag, Thickness:0.04~0.08mm; Width:100~400mm;Length:150~600mm l.	
Label size(for DFD40TI & DFD40I)	Width:70-180mm	
Capacity	1000 packs/hour.	
Machine Size	900×850×620mm	900x760x1010mm
Machine weight	65Kgs	75Kgs



封箱機系列



FXA6050S Carton Sealer
膠帶封箱機



FXC4030X Carton Sealer (side belt conveyor)
膠帶封箱機 (側面輸送)



FXC4050XF Carton Sealer
膠帶封箱機




FXC5050 Carton-Sealer machine (side belt conveyor)
膠帶封箱機 (側面輸送)



DFXC6050A carton sealer (Top & side conveyor)
膠帶封箱機 (左右上驅動)



DFXA5050C Carton sealer (side tapping)

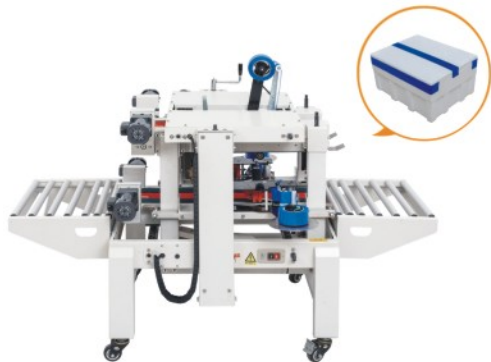

DFXA5030C Carton sealer (Top & side tapping)
膠帶封箱機



DQFXA6050 Automatic carton sealer
全自動膠帶封箱機



DQFXC5045X Automatic carton sealer
(Side conveyor)
全自動膠帶封箱機 (側面驅動)

Specification 技術參數

Model	FXA6050S	FXC4030X	FXC4050XF	FXC5050	DFXC6050A	DFXA5030C	DFXA5050C	DQFXA6050	DQFXC5045X
Power source	AC220V/50HZ;110V,60HZ								
Sealing capacity	About 1,000 standard cases per hour								
Width of the adhesive tape	36,48,60 (mm)	30,45,48 (mm)	30,45(mm)	36,48,60 (mm)	48,60 (mm)	48,60 (mm)	36,48,60(mm)	36,48(mm)	
Way of transmission	Up & down	Side conveyor	Side conveyor	Side conveyor	Top & side	Up & down	Up & down	Side conveyor	
Max.sealing size(WxH)	500x600mm	300x400mm	500x385mm	500x500mm	500x600mm	535x300mm	500x500mm	500x600mm	450x500mm
Min.sealing size(WxH)	150x120mm	80x90mm	100x40mm	130x120mm	130x120mm	110x140mm	220x110mm	150x120mm	80x90mm
Machine size (mm)	1798x706x1377	1569x643x1662	2085x835x1555	1790x800x1410	1848x810x1532	1795x1495x1450	1703x1177x1426	1815x720x1610	1815x720x1610



自動封箱機



FXJ4030ZX Automatic carton sealer
(Auto fold)
自動折蓋封箱機



FXJ5050Z Automatic carton sealer
(Auto fold)
自動折蓋封箱機



FXZ5050 Automatic carton sealer (Auto fold)
DQFXZ5050S Full-automatic carton sealer
(auto fold,full pneumatic)
自動折蓋封箱機



DFXS-7050 Automatic carton edges sealer
全自動角邊封箱機
◆ Options:Full-pneumatic tapping
◆ adjustment (Model:DQFXS7050)



FXC5050A Carton sealer &
DBA200 Automatic strapping machine



DBA200 Automatic Strapping Machine
DBA200 高臺自動捆扎機



Specification 技術參數

Model	FXJ4030ZX	FXJ5050Z	FXZ5050	DFXS-7050 (DQFXS7050)	FXC5050A
Power supply	AC220V/50 , AC110V/60Hz				
Max. packing dimension	300(W) x 400(H)	500(W)x 500(H)mm			
Min. packing dimension	130x80x90mm	200x130x150mm		260x200x180mm	200x130x120mm
Air Pressure		2/3L,5Kg/cm ²		6Kg/cm ²	2/3L,5Kg/cm ²
speed	18m/min				
Width of adhesive tape	48mm. 60mm				
Machine size	2410x745x1470mm	2685x900x1600 mm	2836x1010x1700 mm	1955x1340x1330mm	1735x810x1825mm




ISO9001 CERTIFICATION

AUTOMATIC CARTON PACKING LINE



自動開箱封底機

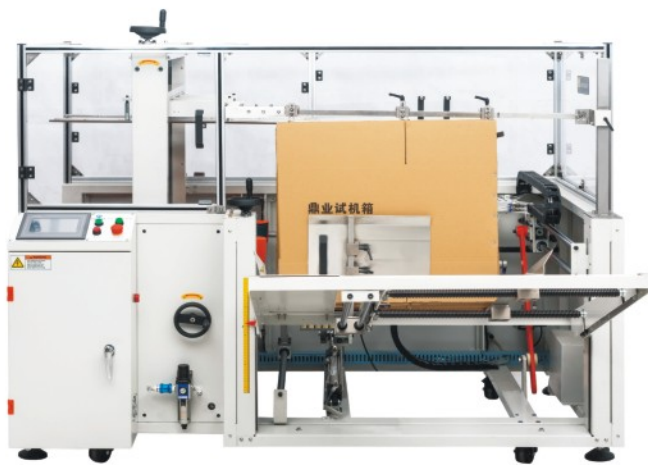

DKX-4540 Carton Erector



DKX50 Horizontal High-speed Carton Erector

Specification 技術参数

Model/型號	DKX4540	DKX50
Power supply/電源	220V/380V 50/60HZ	
Carton size/適用紙箱	L250-450mm,W150-400mm,H150-400mm,L+H ≤ 800mm	L240-510mm,W190-400mm,H120-400mm
Table height/臺面高度	600-780mm	90-1000mm
Capacity/封箱速度	1-8 box/min	10-28 box/min
Air source/氣源	> 500L/min,0.4-0.8 MPa	
Machine size/機器尺寸	2000x1900x1450 mm	2120x2350x2000mm
Machine weight/機器重量	450 kgs	1000 kgs



DFXC-4030CI
Carton Sealing and Labeling Machine (Side Labeling)
膠帶封箱機(側面輸送)



DFXC5050XI
Carton sealer with labeling(side belt conveyor)
膠帶封箱機帶打碼(側面輸送)

Specification 技術参数


Model/型號	DFXC4030CI	DFXC5050XI
Voltage/電壓	AC110V 60HZ or 220V/50Hz	
Power/功率	500W	
Conveyor speed/輸送速度	18m/min	
Tape width/膠帶寬度	30mm 45mm	
Transfer method/輸送方式	Side belt transportation	
Maximum sealing size (W×H)/最大封箱尺寸	300×400mm	500×500mm
Minimum sealing size (W×H)/最小封箱尺寸	80×90mm	
Machine dimensions (L×W×H)/機器尺寸	2090×954×1111mm	2090×975×1455mm




ISO9001 CERTIFICATION

AUTOMATIC CARTON PACKING LINE


Fully automatic cross sealing combination



FXZ5050 Auto folding carton sealer &
DFXS7050 Automatic carton edges sealer

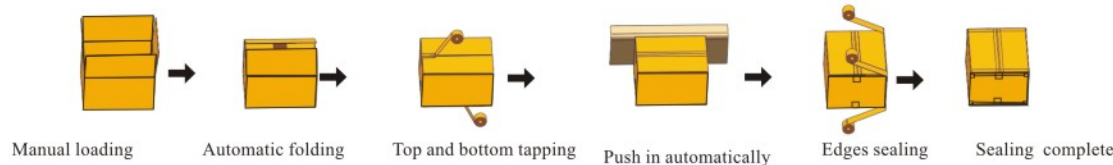

Automatic Carton Packing Line 紙箱封箱包裝綫

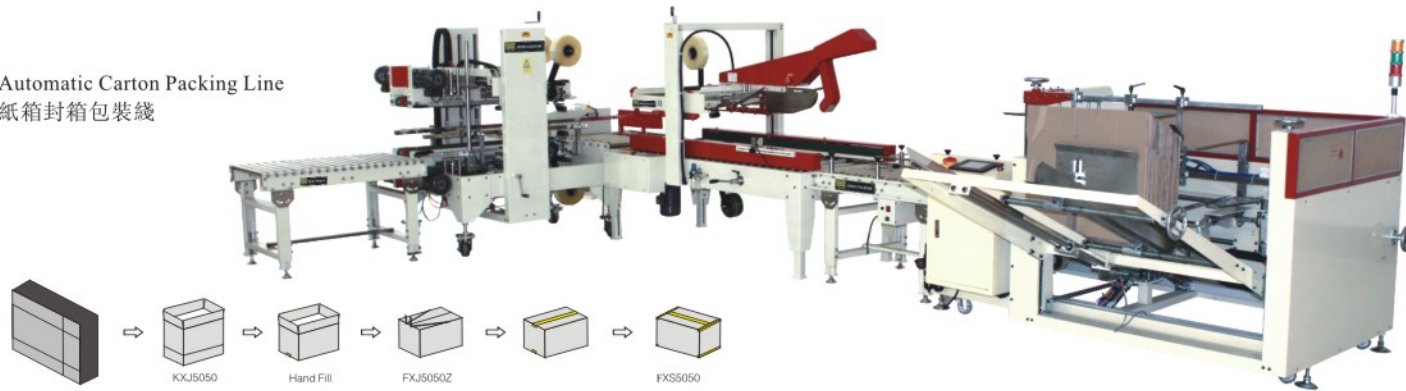



ISO9001 CERTIFICATION

VACUUM PACKAGING MACHINE SERIES

真空包裝機系列



DDZP260 Table-type vacuum packager



DDZ260 Table-type vacuum packager



DZ260 Table-type vacuum packager



DZ400-2T Table-type
vacuum packager
Option: with gas flushing system
臺式真空機



DZ400-2D/DZQ400-2D
DZ500-2D/DZQ500-2D
DZ600-2D/DZQ600-2D
Single Chamber vacuum packager
Option: with gas flushing system
單室真空機(可選帶充氣的)



DZ400-2SB/DZQ400-2SB
DZ500-2SB/DZQ500-2SB
DZ600-2SB/DZQ600-2SB
DZ700-2SB/DZQ700-2SB
DZ800-2SB/DZQ800-2SB
Double-Chamber Vacuum Packager
Option: with gas flushing system
雙室真空(充氣)包裝機



DZL Series Automatic Flexible Vacuum Thermoforming Packager
DZL 系列全自動連續拉伸真空包裝機

• Specification 技術參數

Model	DZ260	DZ400-2T	DZ400-2D DZQ400-2D	DZ500-2D DZQ500-2D	DZ400-2SB DZQ400-2SB	DZ500-2SB DZQ500-2SB	DZ600-2SB DZQ600-2SB	DZL-420T	DZL-520T
Power source	110V/220V/380V 50/60HZ								
Power	1.0KW	1.5KW	1.6KW	2.0KW	2.3KW	3.1KW	16KW	18KW	
Workroom size (mm)	280x390x60	420x440x80	520x540x80	500x450x110	570x540x110	670x540x110	Up film width 392	Up film width 492	
Sealing length (mm)	260x8mm	400x10mm	500x10mm	400x10mm	500x10mm	600x10mm	Down film width 422	Down film width 522	
Sealing speed	1-4 times/minute						4-5 times/minute		
Weight	33kgs	90kgs	105kgs	120kgs	200kgs	250kgs	320kgs	1820kgs	2015kgs
External size (mm)	485x340x345	660x600x600	660x600x1050	760x700x1050	1350x750x950	1350x850x980	1550x850x1020	6150x1080x1880	6600x1180x1880



ISO9001 CERTIFICATION

VACUUM PACKAGING MACHINE SERIES

真空氣調包裝機



DZ280/2SE Household vacuum packer
(Available for flat bag)



P280 Household vacuum packer
(Available for flat bag)



DZ320B Household vacuum packer
(Available for net bag)



DDZ330-2D Multi-function vacuum
packaging machine
DDZ330-2D 多功能真空機



DZ645/2E, DZ840/2E
Multi-function vacuum packager
DZ645/2E, DZ840/2E 多功能真空機

• Specification 技術參數

Model	DDZ330-2D	DZ645/2E	DZ840/2E	DZ400T	DZ-600W	DZ-600F
Power supply	220-240V/50-60HZ					AC 220V/380V, 50/60HZ
Hot sealing power	0.8kw	1.5KW	1.8KW	0.75kw	0.8kw	0.6kw
Vacuum pump power	0.25kw	0.9KW	0.9KW	0.25kw	0.75kw	0.75kw
Sealing-bar size	330×8mm	645×10mm	840×10mm	400×8mm	600×10mm	600×10mm
Vacuum pump stroke volume	4.3m³/h	20m³/h	20m³/h	4.3m³/h	20m³/h	20m³/h
Film thickness (single)	≤0.18mm					
Machine size	400×463×931mm	760×460×820mm	930×460×820mm	500×340×450mm	670×500×1000mm	1000×700×1750mm
Machine weight	45kg	90KGS	100KGS	40kg	80kg	180kgs



DZ400T External Vacuum Packager
DZ400T 外抽式真空包裝機
(DZ400T: MS body; DZ400TS: SS body)



DZ-600W External Vacuum Packager
DZ-600W 外抽式真空包裝機
(DZ-600W: MS body; DZ-600W/S: SS body)



DZ-600F/800F/1000F/1200F
Vertical External Vacuum Packager
立式外抽真空包裝機



DZ-600P/DZ-800P/DZ-1000P
Pillow compression packer
枕頭壓縮包裝機



ISO9001 CERTIFICATION

CONTINUOUS FILM SEALING MACHINE SERIES

多功能薄膜封口機系列

FR-800 Continuous band sealer
自動薄膜封口機FR-900S Continuous band sealer
自動薄膜封口機FR-900V Vertical band sealer
立式自動薄膜封口機FR900W Continuous band sealer
自動薄膜封口機
(conveyor width 400mm, 10kgs loading)FR-900L
自動薄膜封口機FRD-1000L Continuous band sealer
自動薄膜封口機DBF-1000 Automatic inflating film sealer
自動充氣薄膜封口機QLF700A Pneumatic Sealer
氣動封口機QLF-1680 Automatic vertical film sealing machine
QLF-1680全自動立式對口機

• Specification技術參數

Model	FR-800	FR-900(V)	FR900W	FR-900L	DBF-1000	DBF-1000AN	QLF700A	QLF-1680
Voltage	110/220V/50 ~ 60Hz							
Power	650W				680W	600W	2000W	1000W
Working speed	0-12m/min.						2-10time/min.	0-10m/min(can adjust)
Sealingwidth	12mm						10 mm	10mm
Temp.range	0-300℃							
Max.loading	3KGS						50KGS	25KGS
Printing type	Steel wheel printing							
Machine weight	16.5KGS	19KGS	25KGS	22KGS	39KGS	28KGS	100KGS	130kg
Machine size (mm)	800x400x305	850x400x305	900x635x305	820x530x305	925x505x940	925x400x305	860x690x1460	1700x700x1600

NO. 17



ISO9001 CERTIFICATION

CONTINUOUS FILM SEALING MACHINE SERIES

FRD-1000 Solid-ink coding band sealer
多功能墨輪印字封口機FRD1000V Vertical band sealer
立式墨輪印字封口機DBF-1000AN Continuous band sealer
with gas flushing
自動充氣薄膜封口機FRD-1000W Solid-ink coding band sealer
多功能墨輪印字封口機
(Conveyor width 400mm, 10kgs loading)FR-1100C Continuous band sealer
自動薄膜封口機FRD-1200C Solid-ink coding band sealer
多功能墨輪印字封口機LF1080B Continuous Air Suction Band sealer
(Optional: Gas Flushing)
連續式抽氣封口機 (可選配充氮)FR-1100V Vertical band sealer
立式封口機FRD-1200V Vertical sold-inker coding band sealer
立式墨輪印字封口機

• Specification技術參數

Model	FRD-1000 (V)	FRD-1000L	FRD-1000W	FR-1100C	FRD-1200C	FR-1100V	FRD-1200V	LF1080B
Voltage	110/220V/50 ~ 60Hz							
Power	620W			1200W	1355W	1235W	1355W	1400W
Working speed	0-12m/min.							
Sealingwidth	12mm			10mm				
Temp.range	0-300℃							
Max.loading	3KGS					15KGS		3KGS
Printing type	Solid ink coding			Steel wheel printing	Solid ink coding	Steel wheel printing	Solid ink coding	
Machine weight	25KGS		29KW	30KGS	32KGS	42KGS	45KGS	86KGS
Machine size (mm)	920x392x305	940x530x305	970x635x305	1052x400x305	1168x400x305	1243×580×1228	1371×580×1228	1025×450×1080

NO. 18



ISO9001 CERTIFICATION

HAND & FOOT IMPULSE SEALER SERIES

手壓和腳踏封口機系列

FKR Series Direct heat hand sealer
FKR系列手鉗式手壓封口機Hand Impulse Sealer
PFS系列手壓封口機PFS-200M/300M Hand sealer with middle cutter
PFS-200M/300M 手壓封口機 (帶中刀)LFS Hand impulse sealer
LFS加長型手壓封口機

• Specification技術參數

Model	FKR-200	FKR-300	FKR-400	PFS-100	PFS-200	PFS-300	PFS-400	LFS-600	LFS-800
Voltage	AC220V/50 Hz 110V/60Hz								
Impulse power	360W	500W	750W	180W	330W	430W	600W	780W	1050W
Sealing Length	200mm	300mm	400mm	100mm	200mm	300mm	400mm	600mm	800mm
Sealing width	10mm			2mm	3mm				
Heat Time	0.2-1.3sec								
Dimension(mm)	200x200x80	300x250x80	400x300x80	220×72×140	320×80×150	450×85×180	550×85×180	870×145×270	1100×145×270
Weight	1.8 kg	2.0kg	2.2kg	1.8 kg	2.8 kg	4.5kg	5.2kg	6Kg	8Kg

SKA Series
Hand sealer with heat gun
SKA系列手壓封口機帶熱風槍PFS-350Q/450Q/650Q
Pneumatic Impulse Sealer (Desktop)
PFS系列氣動鋁架封口機Foot Stamping Sealing Machine
Sturdy And Durable Aluminium Body
PSF系列鋁架腳踏封口機PFS-DD Series
Direct-heat Foot sealer (Copper bar)
Sturdy and Durable Aluminium Body

• Specification技術參數


Model	SKA-450	SKA-600	PSF-350	PSF-450	PSF-650	PFS-200DD	PFS-300DD	PFS-400DD
Voltage	AC220V/50 Hz 110V/60Hz							
Impulse power	2150W	2280W	500W	1000W	1200W	400W	400W	400W
Sealing Length	450mm	600mm	350mm	450mm	650mm	200mm	300mm	400mm
Sealing width	3mm		8mm			15mm		
Weight	12kg	14kg	18kg	20kg	24kg	16kg	18kg	20kg



ISO9001 CERTIFICATION

INDUCTION SEALING MACHINE SERIES

電磁感應封口機系列

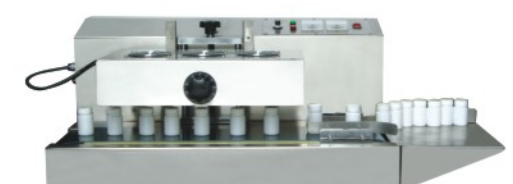DCYF-400A
Portable induction sealer
手持式電磁感應DCYF-400C
Portable induction sealer
手持式電磁感應 封口機DGYF-S500A
Portable induction sealer
手持式電磁感應封口機DGYF-S500B
Portable induction sealer
手持式電磁感應封口機DGYF-S500C
Portable induction sealer
手持式電磁感應封口機DGYF-200
Portable induction sealer
手持式電磁感應封口機LGYF-1500A-II
Continuous Induction sealer
連續式電磁感應封口機LGYF-2000AX
Continuous Induction sealer
連續式電磁感應封口機LGYF-1900
Continuous Induction sealer
連續式電磁感應封口機LGYF-2000BX
Continuous Induction sealer
連續式電磁感應封口機LGYF-3000
Continuous Induction sealer
連續式電磁感應封口機

• Specification技術參數

Model	DCYF-400	DGYF-200	DGYF-S500A	DGYF-S500B	DGYF-S500C	LGYF-1500A-II	LGYF-2000AX(BX)	LGYF-1900	LGYF-3000
voltage	110V/220V 50/60HZ					220V 50/60HZ			
Power	600W	500W	500W	500W	600W	1.5KW	1.5KW	2.0KW	3.0KW
Capacity	0-30pcs/min					0-10m/min	0-12m/min	0-15m/min	0-18m/min
Sealing Diameter	20~100mm(400A) 50~160mm(400C)	20~80mm	20~100mm	15~35mm	60~130mm	20~50mm	0~120mm	20~60mm(1900A) 60~150mm(1900B)	20~150mm
Height of bottles						40-200mm	40-400mm	20-350mm	20-400mm
Machine weight	0.75KGS(400A) 0.90KGS(400C)	4KGS	5KGS	5KGS	5KGS	38KGS	72KGS	38KGS	60KGS
Machine size(mm)	135x135x232(400A) 190x190x245(400C)	280x230x115	340x290x150	340x290x150	340x290x150	1150x480x400	1550x550x1350	1200x360x1350	680x970x1450




ISO9001 CERTIFICATION


PISTON FILLER FOR LIQUID / PASTE

氣動液體/膏體灌裝機

For Liquid

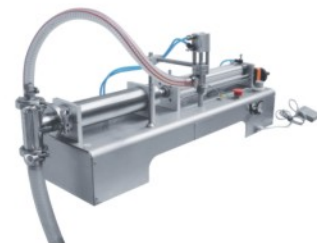

GC-A
Semi-auto Liquid Filler
單頭氣動液體灌裝機

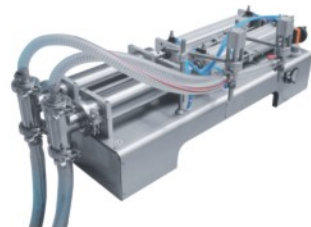

GC-A/2
Semi-auto Double Nozzle Liquid Filler
雙頭氣動液體灌裝機



GC-BL
Semi-auto Liquid Filler
氣動液體包裝機



GCG-BL/2 Semi-auto Double
Nozzle Liquid Filler
雙頭氣動液體灌裝機

For Paste



GCG-A
Semi-auto Paste Filler
單頭氣動膏體灌裝機



GCG-A/2
Semi-auto Double Head Paste Filler
雙頭氣動膏體灌裝機




GCG-BL
Semi-auto Paste Filler
氣動膏體包裝機



GCG-BL/2 Semi-auto Double
Nozzle Paste Filler
雙頭氣動膏體灌裝機


Fully Pneumatic

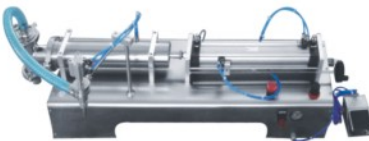

GC-P
Fully Pneumatic Liquid Filler
全氣動液體灌裝機



GC-P/2
Double Nozzle Fully
Pneumatic Liquid filler
雙頭全氣動液體灌裝機

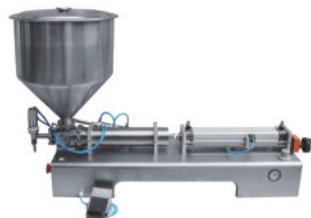

GCG-P
Fully Pneumatic Paste Filler
全氣動膏體灌裝機



GCG-P/2
Double Nozzle Fully
Pneumatic Paste filler
雙頭全氣動膏體灌裝機

Specification技術參數

Model	GC-BL,GC-A , GC- P	GC-BL/2 ,GC-A/2, GC-P/2	GCG-BL,GCG-A , GCG-P	GCG-BL/2 ,GCG-A/2 , GCG-P/2
Filling Type	One nozzle	Double nozzle	One nozzle	Double nozzle
Air supply	400L/min 0.6Mpa	600L/min 0.8Mpa	400L/min 0.6Mpa	600L/min 0.8Mpa
Filling range (ml)	50-100ml, 100-250ml, 200-500ml, 100-1000ml, 200-2000ml, 500-3000ml,1000-5000ml			
Efficienc (Bottle/hour)	600-1500	1000-2800	600-1500	1000-2800



ISO9001 CERTIFICATION

LIQUID / PASTE FILLING MACHINE




A02 Pneumatic filler(pedal)
氣動灌裝機



A03 Manual filler
手動灌裝機



GCG-MIX Table type paste filler
with mixing hopper
氣動膏體灌裝機帶攪拌

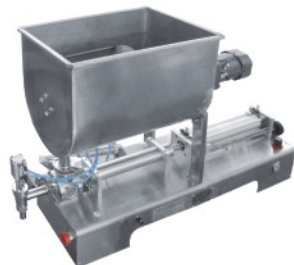

GCG-MIX-II Table type paste filler
with mixing hopper
氣動膏體灌裝機帶攪拌



YT180-1
Digital Control Liquid Filler
數控液體灌裝機



RDB-1A
Peristaltic Pump Filler
蠕動泵灌裝機



GYL-1000
Vertical Pneumatic Filler
立式氣動灌裝機



GC-A/5000
Semi-auto Liquid Filler(5000ml)
半自動液體包裝機



CZ-50 Semi-automatic liquid filler
with weighing system
半自動液體灌裝機帶稱重



FF-2
Corrosive liquid filler
半自動腐蝕液體灌裝機



YT-2 Liquid filler
(negative pressure)
半自動液體負壓灌裝機



YT-4 Liquid filler
(negative pressure)
半自動液體負壓灌裝機

Specification技術參數

Model	GCG-MIX	GCG-MIX-II	YT180-1	RDB-1A	GYL-1000	GC-A/5000	CZ-50	FF-2	YT-2	YT-4
Power supply	AC220/110V 50/60Hz									
Filling range(ml)	100-1000	100-1000	2-1000	1-5000g	120-1200	1000-5000	5000-50000	100-1000	liquid level control	
Filling accuracy	≤1%									
Machine size(mm)	1310x380x380	1310x380x380	320x320x210	160x350x350	440x440x1580	1350x550x450	2000x1650x1500	620x480x1570	480x420x1550	780x420x1550



ISO9001 CERTIFICATION

AUTOMATIC FILLING & CAPPING LINE

自動灌裝流水綫

沐浴液、洗發水、洗潔精、洗衣液、洗手液、洗滌劑、消毒液等日化半流體灌裝、搓蓋、貼標生產綫

Bath Foam, Shampoo, Liquid Detergent, Cleanser Essence Chemicals, Semi-Fluid Filling, Rubbed cap, Etc Household Laundry Detergent, Liquid Soap, Disinfectant Labeling —Bottling line




果醬、濃縮果汁、粒粒爽飲料、面霜、精油、乳膏、凝膠劑等高濃度物料的灌裝、旋蓋、貼標生產綫

Jam, Concentrated fruit juice, Citrus cool drinks, Cream, essential oil Creams, Gels, Such As High Concentration of Materia Filling, Capping, Labeling-Bottling Line



瓶裝粉劑的理瓶、灌裝、旋蓋、感應封口生產綫

Bottled Powder, Bottle Unscrambler, Filling And Capping, Induction Sealing Machine-Bottling line

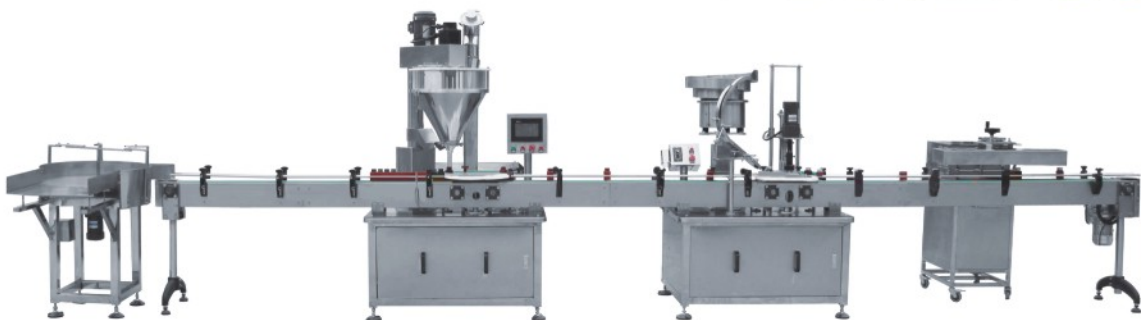


ISO9001 CERTIFICATION


LIQUID & PASTE FILLING AND CAPPING LINE

灌裝機系列

LIQUID & PASTE FILLING MACHINE

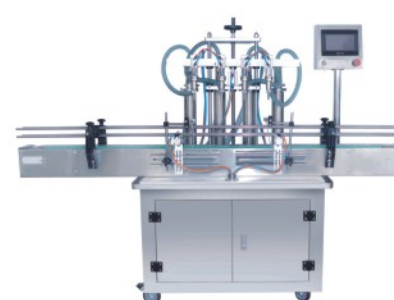

ZY Series Liquid Filler
直綫式液體灌裝機

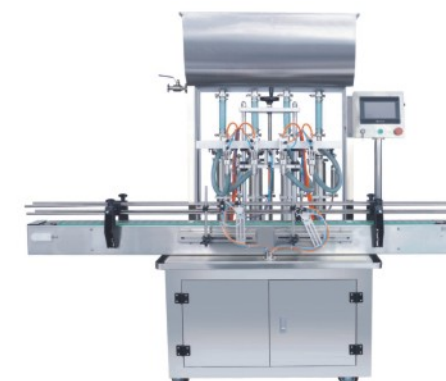

GT Series Paster Filler
直綫式膏體灌裝機



FT series filler for anti-corrosion liquid
直綫式防腐蝕液體灌裝機

Application: Water, Shampoo, Dishwashing liquid, Yoghurt, Oil, Tomato sauce, Fruit jam etc

Programmable logic controller (PLC) in conjunction with touch screen operation insures the piston pump filling system performs consistently.

Plunge filling system for foam liquids, such as shampoo

Specification

ITEMS	ZY-2	ZY-4	ZY-6	ZY-8	GT-2	GT-4	GT-6	GT-8	FT-4	FT-6
Filling product	Liquid; water				Semi-fluid; Paste				Liquid	
Filling nozzles	2	4	6	8	2	4	6	8	4	6
Ideal filling range	20-100ml\50-250ml\100-500ml\200ml-1000ml\500-2500ml\1000-5000ml									
Filling speed (1000ml)	480BPH	960BPH	1440BPH	1920BPH	480BPH	960BPH	1440BPH	1920BPH	960BPH	1440BPH
Filling precision	20-1000ml: $\leq \pm 1\%$ 1000-5000ml: $\leq \pm 0.5\%$									
Air consumption (m ³ /min)	0.17	0.25	0.25	0.36	0.17	0.25	0.25	0.36	0.25	0.25
Power supply	220~240V 50Hz									
Power consumption	0.75Kw	1 kw	1 kw	1 kw	0.75Kw	1 kw	1 kw	1 kw	1 kw	1 kw

AUTOMATIC CAPPING MACHINE



YQX-1 Capper (plastic cap)
自動鎖蓋機（塑料蓋）



YQZ-1 Capper (sport cap)
自動鎖蓋機（運動蓋）



FXZ-1 Capper (Aluminum ROPP cap)
自動鎖蓋機（鋁蓋）

Specification

Model	YQX-1	YQZ-1	FXZ-1
Cap type	Plastic screw cap	Sport cap	ROPP cap
Capping head	1 head		
Capacity	2000bottles/hour		
Diameter of bottle	Φ50-100mm (bottle can be round or flat)		
Height of bottle	100-350mm		
Cap size	Φ20-35mm		
Power	0.75kw	0.87Kw	0.87Kw
Machine size	940*690*2000mm	1250*690*2000mm	1250*690*2000mm
Machine weight	350Kg	380Kg	380Kg



ISO9001 CERTIFICATION

BOTTLE WASHING, FILLING & CAPPING MACHINE

洗瓶灌裝封蓋生產綫

MODEL BF2000

The Production Line of Washing, Filling and Capping Machine

2000瓶/h 衝瓶灌裝封蓋生產綫



CP-30 Washer



GC-12 Filler & YQX-3 Capper




BSL1538A label shrink

MODEL BF2000A

Automatic bottle washing, filling and capping line

全自動洗瓶灌裝封蓋生產綫

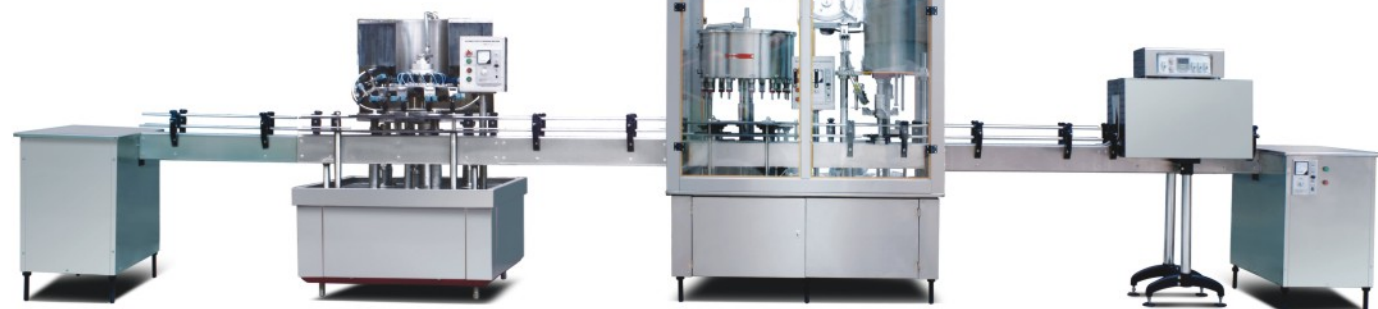

ZPC-12 Auto Washer



GC-12 Filler & YQX-3 Capper



BSL1538A label shrink

The line is composed of bottle washing, filling, capping and label shrinking machine, used for PET plastic bottles, glass bottles, can fill mineral water, fruit juice, soy sauce, wine and so on. Machine adopt very simple electric controller and very easy adjustment, suit for various types of bottles, It is the ideal production line for beverage makers.

• Specification技術參數

Name & Model	CP-30 Washer	ZPC-12 Washer	GC-12 Filler	YQX-3 Capper	BSL1538A label shrink	Conveyor
Capacity	1500-2000 BPH	2000-2500 BPH	1500-3000BPH	2000BPH	1500-2000BPH	100-2500BPH
Working Position	30	12	12	1		
Volume of bottle	300-1500ML	200-1500ML	200-1500ML	350-1500ML	200-1500ML	
Power	0.55Kw 220/380V	0.75Kw 220/380V	0.75Kw 220/380V	0.55KW 220V	3.5KW 220/380V	0.75KW 220/380V
Dimension	100x100x140CM	135x135x190CM	175x115x200CM		105x60x80CM	100x72x220CM
Weight	200Kgs	800Kgs	900Kgs		80Kgs	200Kgs



ISO9001 CERTIFICATION

MONOBLOC BOTTLE WASHING, FILLING AND CAPPING MACHING(3IN1)

純淨水灌裝三合一（衝瓶、灌裝、鎖蓋）

CGF Series PET Bottle Washing, Filling, Capping Machine 3 in 1



Model	CGF8-8-4	CGF14-12-5	CGF18-18-6	CGF24-24-8	CGF32-32-10	CGF40-40-12
Washing heads	8	14	18	24	32	40
Filling heads	8	12	18	24	32	40
Caping heads	4	5	6	8	10	12
Production capacity (b/h)	2000	4000	7000	10000	14000	18000
Motor power (kw)	2.8	3.2	3.8	4.2	5.6	7.5

MODEL BF2000B

Carbonated drink bottle filling and capping machine



• Specification技術參數

Model	GD-12	Model	QHS-1500	Model	QLB-10FC
production capacity	800-2000Bottle/H	Production capacity	1500L/H	Production capacity	1000L/H
can pressure	0.2-0.5Mpa	Inlettemp of chilledwater	0-4℃	Temperature chill	from 25℃ to 5℃
filling temperature	0-4℃	Working pressure	0.2-0.5Mpa	Cooling capacity	25800Kcal/H
power	1.1kw	Power	2kw	Power	10HP

QLB-10FC Water chiller



ISO9001 CERTIFICATION

AUTOMATIC LIQUID PACKAGING MACHINE

全自動液體包裝機系列



AS1000 Automatic Liquid Packaging Machine
AS2000 Automatic Liquid Packaging Machine
全自動液體包裝機



AS2000P
Automatic liquid packer (With Photocell)
全自動PE膜液體包裝機

• Specification技術參數


Model	AS1000	AS2000	AS2000P
Capacity	1500bags/Hour		1300bags/Hour
Volume	200ml-500ml can be adjusted	300ml-1000ml	200ml- 1000ml
Power	220V/380V 1.6KW	220V/380V1.8kw	220V/380V1.8kw
Film width	320mm/240mm	320mm/380mm	320mm/240mm
Weight	400kgs	450kgs	500kgs
Size	970×870×1970mm	1050×870×2100mm	1050×870×2100mm



ISO9001 CERTIFICATION

BOTTLE WASHING,FILLING,CAPPING MACHINE

灌裝封蓋生產綫

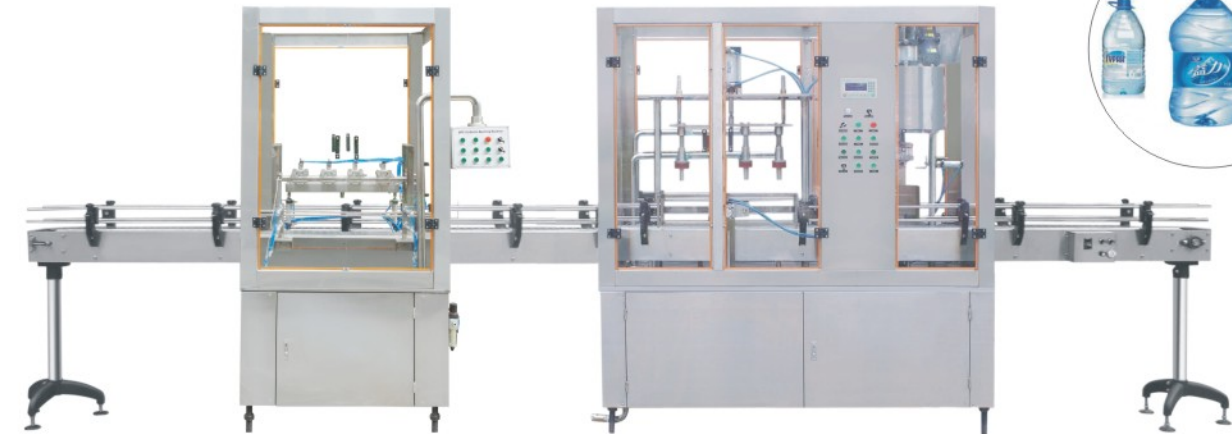

DW-5L Automatic bottle washing machine

DFC-5L Automatic filling & capping machine



- ◆ DFC-5L Filling and capping machine is a 2 In 1 equipment which is special designed for big volume bottle from 3 Litre upto 5 Litre.
- ◆ Omron PLC with easy to use, and equipped with an text screen to access the control panel system.
- ◆ A shut-off nozzle gother with balance return serve to prevent bubble formation during the filling process.
- ◆ All parts in contact with filling material is made of Stainless steel 304L to meet GMP standard.

• Specification技術參數

Model	DW-5L	DFC-5L
Capacity	800-1500BPH	800-1500BPH
Filling Position	4	4
Volume Of Bottle	3-5L	3-5L
Capping Head	1	1
Power	0.75KW 220V/380V	0.75KW 220V/380V
Air Source Supply	400L/min,8Bar	600L/min,8Bar



5 Gallon Bottle Wash-fill-cap Machine

• Specification技術參數

Model	QGF-100	QGF-150	QGF-240
filling volume	5 Gallon	5 Gallon	5 Gallon
Barrel Sizes	276x496mm	276x496mm	276x496mm
Production capacity	100BPH	120BPH	200BPH
Power	2KW 220V 50Hz	2.5KW 220V 50Hz	3KW 220V 50Hz
Air source supply	400L/min 0.6Mpa	400L/min 0.6Mpa	400L/min 0.6Mpa



This automatism product line series is the same with producing of three-five gallon barrelage drinking water. It has sane structure and be easy in use. The whole machine adopted PLC procedure to control the working-washing barrel, douching, capping and etc. The barrel would be scouring from inside to outside repetitious and the disinfecter could be used circularly. This machine is made of stainless steel and accords with healthy standard of foods.



純淨水/礦泉水生產設備




All-in-one reverse osmosis pure water machine
一體化反滲透純水機



All-in-one Ultra-filtration Mineral Water Machine
一體化超濾過濾設備 (礦泉水)

反滲透膜示意图

DIAGRAM OF RO

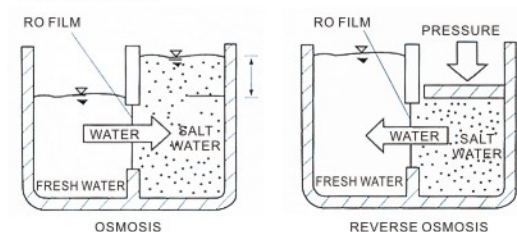

The pure water production line is composed of pre-filter of sand filter, carbon filter, ion-exchanger and reverse osmosis and ozone generator, it is ideal equipment for pure water production as simple techniques, high water quality, easy operation and maintenance.

Specification 技術參數

Model/型號	P-RO-0.5	P-RO-1	P-RO-2	P-RO-3	P-RO-5	P-RO-10
Capacity/效率	500L/H	1000L/H	2000L/H	3000L/H	5000L/H	10000L/H
Pre-filter capacity/預過濾量	1000L/H	2000L/H	3000L/H	5000L/H	7000L/H	12000L/H
Ozone generator / 臭氧反應	3.50g/H	3.50g/H	6g/H	10g/H	15g/H	15g/H



Storage Water Tank
(Single jacket)



Heating Tank (steam)
(Three jacket)



Mixing Tank (lid open)
(Single jacket)



Mixing Tank (full seal)
(Single jacket)



Heat-cool Tank (mixing)
(Three jacket)



水處理和灌裝流水線

Capacity ≥3000 BPH




3 In 1 Filling line



Sleeve Wrapper+Shrink Tunnel

Capacity ≤2000 BPH

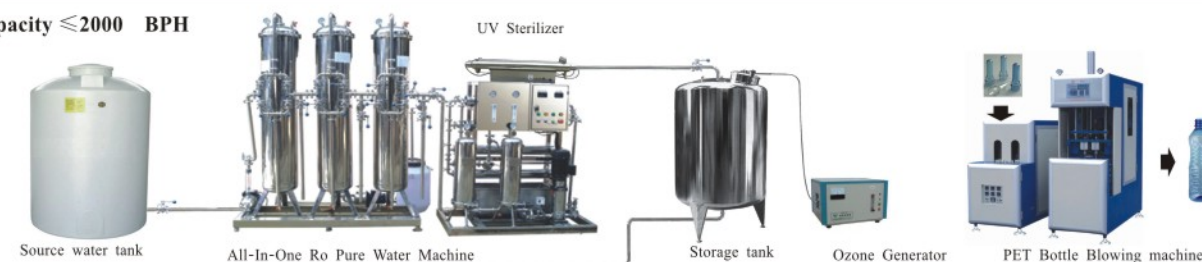

Washer

Filler

Capper

Label shrink machine

Sleeve Wrapper+Shrink Tunnel

option

Date printer:




Ink Jet Printer
(Automatic Printing)



Hot Code Printer

Label Shrink& Adhesive Label

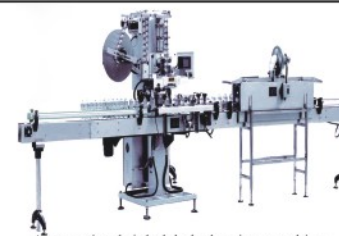

Automatic shrink label sleeving machine
+ steam label shrink tunnel



Self-adhesive Labelling machine

Carbonated Drink:



Sugar melting tank



Syrup cooler



Mixing Tank



Water Chiller



Drink Mixer (Carbonator)

Raw Material:



PET Preform



Plastic Cap



ZWX-2 UV Sterilizer



Water Pump



ISO9001 CERTIFICATION

SEMI-AUTOMATIC STRETCH BLOW MOULDING MACHINE

半自動吹瓶機

DYS-2-1500 Semi-automatic Stretch Blow Moulding Machine
半自動吹瓶機

- ◆ Suitable for CO2 bottle ,mineral water bottle,pharmaceutical bottle,oil bottle,cosmetic bottle ,hot filling bottle
- ◆ Two-bar linkage clamping design, increased clamping force.
- ◆ Adopting high technology Micro PLC controller .
- ◆ Sure the machine working properly and stable infra-red pre heater gives equilibrium temperature for inside and surface of the perform.

Specification技術參數

Model	DYS-2-1500
Container volume	0.1-2.5L(2-cavity) 3-6L(1-cavity)
Capacity output	0.1-1.25L:800 BPH3-6L: 400BPH
Max.bottle height	360mm
Max.bottle diameter	180mm
Air compressor	0.6 M3 30Bar 10Hp
Power	6KW



ISO9001 CERTIFICATION

AUTOMATIC STRETCH BLOW MOULDING MACHINE

自動吹瓶機



DYB-3-1500 automatic blowing machine

Features

- ◆ The machine adopts human-computer interface to control the whole working procedures, auto-loading, auto blowing, auto dropping, action cylinders are all assembled with magnetic induction switches. Connect with PLC to control every step and test every cylinder. Next action will continue after the former step done, if former step is not finished, alarm automatically and do not work. PLC displays problem position
- ◆ Fast speed, accurate position, smooth action
- ◆ Production workmanship process is fully automatic to make best quality and pollution-free. It holds less investment, high efficiency, easy operation, simple repair, safety etc.

Specification技術參數

Model	DYB - 3-1500
Theoretical output	3300B/H
Max volume	1.5L
Max height	360mm
Max diameter	105mm
Number of cavities	3
Mould plate dimension	L:430mmxH 360mm
Mould thickness	190mm
Mould opening stroke	110mm
Power	220-380V/50-60HZ
Total power	18kw
Heating power	15kw
Operation pressure	0.8-1.0Mpa
Action air consuming	=1.0m³/min
Blowing pressure	=4.0Mpa
Blowing air consumption	=2.4m³/min
Main body dimension	L:2700xW1450xH2000mm
Main body weight	2000kg
Preform autoloader dimension	L:1600xW850xH2200mm
Preform autoloader weight	200kg



High pressure air compressor



Low pressure air compressor



Gas holder



Air dryer



Air filter



water chiller



ISO9001 CERTIFICATION

INTELLIGENT WEIGHING FILLING MACHINE

智能分裝機



FZ-100
Intelligent weighing filler
(granular)
FZ-100 智能分裝機



FM-100
Intelligent weighing filler
(powder)
FM-100 智能分裝機



FL-100
Intelligent weighing filler
(rotary type)
FL-100 智能分裝機



FZ-1000
Intelligent weighing filler
(big volume)
FZ-1000 智能分裝機

• Specification 技術參數

Model	FZ-100	FM-100	FL-100	FZ-1000
Filling product	General granular	Powder	Long particle	Granular
Filling model	Vibration drop	Vibration drop	Rotary vibration	Vibration drop
Filling volume	1-99.9g			10-999g
Filling accuracy	±0.3g	±0.3g	±0.3g	±2g
Filling speed	10-25pcs/min			
Machine material	Stainless steel			
Power source	AC220V 50Hz			
Film type	/			
Sealing type	/			
Bag size	/			
Power	150W	150W	180W	200W
Weight	9kgs	9kgs	19kgs	25kgs
Dimension	380x280x500mm	400x280x530mm	380x380x440mm	580x380x1030mm



FZL-100
Sachet forming and sealing machine
FZL-100 顆粒包裝機



FZL-500
Sachet forming and sealing machine
FZL-500 顆粒包裝機



FYL-100 Liquid sachet forming and sealing machine
FYL-100 液體包裝機
Option: Photocell for film with eye-mark; Date Printer

NO. 33



ISO9001 CERTIFICATION

ELECTRONIC QUANTITATIVE WEIGHER SERIES

電子定量稱系列



ZX-D Granule feeder
Height: 1900mm
Feeding capacity: 18CBM/Hour(adjusted)
Hopper volume: 0.15CBM



KFG-Series Semi-auto
granule filling machine
KFG系列半自動顆粒灌裝機



DYCS Series Electronic
Quantitative Weigher

• Specification 技術參數

Model	KFG-250	KFG-500	KFG-1000	KFG-2000
Power	0.4Kw			
Power source	AC220V 50Hz			
Capacity	50pcs/min	40pcs/min	35pcs/min	25pcs/min
Filling volume	50-250ml	250-500ml	500-1000ml	1000-2000m
Dimension	650×450×1600mm		650×500×1800mm	
Weight	100Kgs			

Model No.	Range of Weighing(g)	Precision (g)	Packing Speed (Bag /min)
DYCS-1	25-1000	≤ ± 2	18-25
DYCS-2	50-2000	≤ ± 4	15-25
DYCS-10	1000-10000	≤ ± 15	8-18

• Specification 技術參數

Model	DF	DF-Y	DF-B
Power	AC220V 1100W	AC220V 900W	AC220V 700W
Packing accuracy	±1%		
Filling range(Need to replace filling screw)	5g-5000g		1-500g
Capacity	1500-3000 bags/hour (Depending on the packing specifications)		
weight	350kg	200kg	80kg
size	2000×850×1950mm	1000×850×1950mm	700×550×1100mm

粉劑灌裝機系列



Hopper volume
螺旋上料機



DF Automatic Powder
Filler With Conveyor



DF-Y Semi-automatic Powder Filler



DF-B Small Powder Filler

NO. 34



ISO9001 CERTIFICATION

GRANULE/POWDER/LIQUID SACHET PACKAGING MACHINE

全自動立式包裝機



DXDK-40 / DXDK-150
Automatic granule packer
全自動顆粒包裝機



DXDF-40 / DXDF-150
Automatic powder packer
全自動粉末包裝機



DXDY-40 / DXDY-150
Automatic Liquid/Paste Packager
全自動液體 / 膏體灌裝機

The DXD series automatic packing machine adopted advanced photo electricity track planet differential compensating mode and automatic constant temperature control mechanism, which makes our machine has very fast packing speed. Automatically finish whole packing processed of bag making, computation, filling, sealing, cutting, counting and heat pressing batch number on the bag. It can be used for various compound packing materials.

• Specification 技術參數

MODEL	DXDK-40	DXDF-40	DXDY-40	DXDK-150	DXDF-150	DXDY-150	DXDK-800
Voltage	220-240V 50Hz						
Filling Range	5-40 ml			30-150ml		30-120 ml	200-1000ml
Filling Product	Granule	Powder	Liquid -Y1 Paste -Y2	Granule	Powder	Liquid -Y1 Paste -Y2	Granule
Bag Size	L55-110 /W30-80mm			L70-150 /W70-115mm			
Capacity	50-110 bag/min		30-65 bag/min	35-60 bag/min		28-55 bag/min	28-60 bag/min
Sealing Type	3, 4-side			3, 4-side; Back seal			Back seal
Power	1.5kw			1.9kw			1.8kw
Machine Body	Stainless Steel						
Dimension (L*W*H)	600× 790×1780 mm			700×800×1900 mm			1200× 800×2000 mm
Weight	300 kg			350 kg			400 kg



ISO9001 CERTIFICATION

AUTOMATIC VERTICAL PACKAGING MACHINE SERIES

自動稱重包裝機

Suitable for all kinds of instant food,frozen food,meat, fruits&nuts, tea leaves,seeds and other anti-oxidized fresh food with vacuum packages

Auto complete feeding,lifting & conveying,electronic weighing, pouch-making,filling,vacuum sucking or air charging(need extra vacuum device),sealing slitting and end conveying.
The whole works can continuously be done in a process,and equip with multi-head electronic scale.

• Specification 技術參數

Model	FL420
Bag size	Length:50-320mm Width:60-200mm
Substrate	Rolls
Capacity	30-60bags/min
Filling range	5-1500g
Film Max.width	420mm
Film thickness	0.04-0.12mm
Air consumption	0.5m ³ /min
Power	2.2kw
Voltage	380V/50-60Hz
Weight	1200kg
Dimension	4400x2000x3600mm
Optional equipment	weight & metal detector




Multi-Head Weigher & FL420 Automatic Vertical Packaging Machine



智能型給袋式包裝機

• Specification 技術參數

Model	TW8-200C
Bag size	(L)100-370mm (W)70-220mm
Packing Speed	20-60Bags/Min depends on product
Power Supply	380V, 50Hz, 3P5L 6.5 Kw
Compressed air consumption	≤ 0.45 m3/min (Compressed air is provided by user)
Weight	1000 Kg
Dimension (L,W,H)	1642x1402x1570 (mm)
Material	304 Stainless Steel
Filling Range	5-1500g
Pneumatic Component	SMC ,AirTAC
Vacuum Component	ORION(Pump) , SMC
Electrical Appliance	Delta for standard , or Siemens or OMRON
Bag types	Stand-up bag , Portable bag , Zipper bag 4-side bag , 3- side bag , compound bags
Bag Material	PA/PE PET/PE AL film etc.

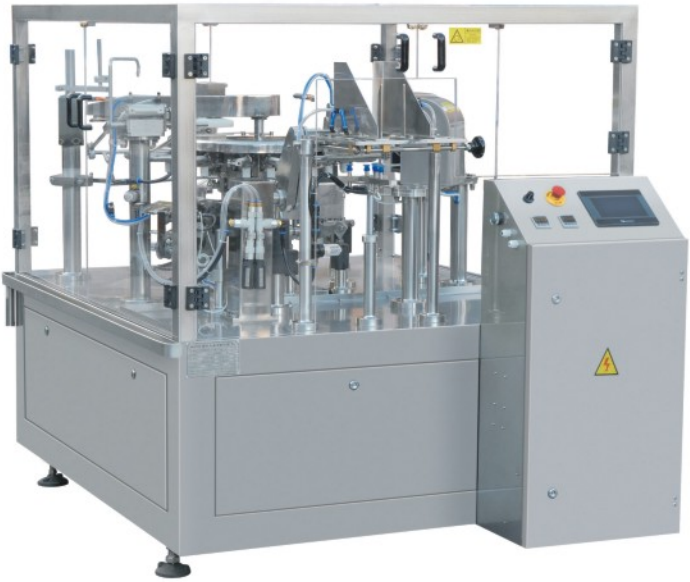

TW8-200C
Intelligent Rotary Packaging Machine




貼標機




MT-50
Round bottle label machine
圓瓶貼標機



MT-50C
Round bottle label machine with coding
圓瓶貼標機帶打碼機

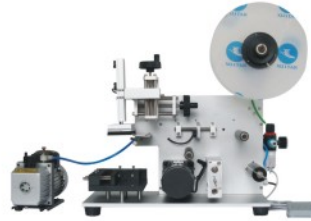

MT-60
Flat label machine
平面貼標機

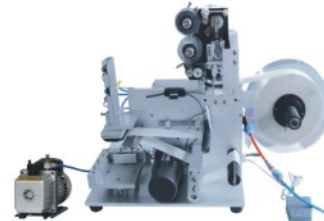

MT-60C
Flat label machine with coding
平面貼標機帶打碼機



TZ200 Automatic labeling machine (on-line type)
TZ200 全自動貼標機 (在綫式)



TZ200-II Automatic labeling machine with conveyor
TZ200-II 全自動貼標機 (帶輸送)



MT-130
Desktop automatic round bottle labeling machine
全自動圓瓶貼標機



MT-200
Automatic round bottle labeling machine
全自動圓瓶貼標機

• Specification 技術參數

Model	MT-50/MT-50C	MT-60/MT-60C	TZ200	MT-130	MT-200
Voltage	220V 50Hz/110V 60Hz				
Power	120W	220W	150W	500W	800W
Label speed	10-40pcs/min		0-30pcs/min	10-90pcs/min	10-60pcs/min
Label accuracy	± 0.5mm		±1mm	± 1mm	According to bottle
Label roll inner diameter	> 75mm		75mm	75mm	75mm
Max label roll out diameter	< Φ250mm		270mm	200mm	Φ260mm
Products size (mm)	Φ 20mm-120mm		L:50-350,W:0-200(mm)	Φ 20-100.H 25-300(mm)	Φ 30mm-100mm
Size of label (mm)	< W150xL230mm	< W120xL80mm	W:10-130mm	L:15-200.W:10-140 (mm)	Min L30xW20 Max L200xW150
Machine size (mm)	650x450x450mm	650x450x650mm	700x600x1500mm	1430x1050x940mm	2000x800x1350mm
Gross weight	25kg	35kg	85KGS	180KGS	150kg



封尾機系列



FWJ-30A
Semi-auto plastic tube filling and sealing machine
半自動軟管灌裝封尾機



FWJ-30B
Semi-auto aluminum tube filling and sealing machine
半自動鋁管灌裝封尾機



FWJ-60A
Automatic tube filling and sealing machine (plastic tube)
自動軟管灌裝封尾機



FWJ-60B
Automatic tube filling and sealing machine (metal tube)
自動鋁管灌裝封尾機

• Specification 技術參數

Model/型號	FWJ-30A/FWJ-30B	FWJ-60A/FWJ-60B
Voltage/電壓	110V/220V 50/60hz	
Motor Power/電機功率	1.5KW	2KW
Sealing Power/熱封功率	1.4KW	3KW
Filling Accuracy/灌裝精度	± 1%	
Capacity/灌裝速度	10-20pcs/min	30-60pcs/min
Filling range/灌裝範圍	5-300ml	5-600ml
Tube Diameter/軟管直徑	φ 15-φ50mm/φ15-φ30mm	φ 15-φ50mm/φ15-φ30mm
Tube length/軟管長度	30-220mm (Customizable)	80-250mm (Customizable)
Tube Material/軟管材質	Plastic/Metal	Plastic/Metal
Size of Letter Printed/印字字粒大小	2x3mm-5x5mm	
Air Supply/壓縮空氣	0.55-0.65MPA	
Machine size/機器尺寸	1100x780x1450mm	2620x1020x1980mm
Weight/機器重量	350kg	800kg



ISO9001 CERTIFICATION

DESKTOP CUP SEALER SERIES & DESKTOP TRAY SEALER SERIES

臺式封杯機系列



(Available Cup ϕ 95mm)
DY95Manual cup sealing machine
DY95ASemi-automat cup sealing machine

QZD95 Automatic cup
sealing machine

DY2014 Manual tray sealer
DY2014A Semi-auto tray sealer

QZD2014 Automatic tray sealer

• Specification 技術參數

Model	DY95/DY95A	QZD95	DY2014/DY2014A	QZD2014	QD-330/QD-400	TW-180
Operating mode	Manual/Semi-auto	Automatic	Manual/Semi-auto	Automatic	Automatic	Semi-auto
Cavity	1	1	1	1	2 or 4	4
Power source	110V 60HZ/220V 50HZ					
Sealing film	PE, PP, PET/PE, laminated film, aluminum film(customized)					
Power	200W	530W	850W	1000W	1600W/2000W	1100W
Capacity	700cups/hour	720 cups/hour	360pcs/hour	400pcs/hour	480/960pcs/hour	960pcs/hour
Weight	18Kgs	40 Kgs	30Kgs	50Kgs	68Kgs/90Kgs	40Kgs
Dimension mm	260×240×650	490×270×720	450×450×730	300×260×650	750x1000x780 850x1150x780	650x900x780

臺式封盒機系列



YTF-240 Manual tray sealer

QD-330/QD-400 Automatic tray sealer

TW-180 Automatic tray sealer



ISO9001 CERTIFICATION

DESKTOP TRAY SEALER SERIES

臺式封杯機系列



SK-350 Tabe type skin vacuum packager

TP260 Table type tray sealer with gas filling

QDY2014 Automatic tray sealer
(with vacuum & gas filling)



TW-280/TW-410/TW-750
Continuous Tray Sealer
Option: Vacuum / Gas Flushing



型號/Model	SK-350	TP260	QDY2014	TW280	TW410	TW750
電壓/Voltage	220V 50/60HZ			220V or 380V 50/60HZ		
功率/Power	2.4KW	1.3KW	2.3KW	2.45KW	4.0KW	6.5KW
托盤最大尺寸/Max.size of Tray	310x200mm (1 cavity) or 200x140mm(2 cavity)			260x190mm (1 cavity)	260x170mm(2 cavity)	200x140mm(4cavity)
包裝速度/Capacity(trays/H)	120-360			270	550	1200
殘氧量/ Residual oxygen	<0.5%					
工作氣壓/Air-pressure	0.6-0.8Mpa					
機器重量/Weight(KGS)	80	120	210	280	370	450
機器尺寸/Machine size(mm)	670x530x600	950x830x850	780x650x1600	2180x590x1500	2180x755x1500	2180x1055x1500



ISO9001 CERTIFICATION

AUTOMATIC CUP FILLING & SEALING MACHINE

全自動杯盒灌裝封蓋機



- With photo cell
- Automatic drop cup sets
- 光電檢測封口膜，自動落杯裝置



Two cups

BG32A
Automatic cup filling and sealing machine



Four Cups

BG60A
Automatic cup filling and sealing machine



BG32V Automatic cup filling and sealing machine (Two cups)
BG60V Automatic cup filling and sealing machine (Four cups)
Vacuum for pick-place aluminum foil cover



BG32P Automatic cup filling and sealing machine (Two cups)
BG60P Automatic cup filling and sealing machine (Four cups)
For sticky liquid and paste material filling

本機適用於豆奶、乳酸奶、果汁飲料、礦泉水等飲料品類的包裝。自動完成落杯、灌裝、紫外線殺菌、光電跟踪、日期打印、封口、切邊等。該機採用不銹鋼製造，結構簡單，性能可靠，可根據特殊要求進行定制。

This machine is made of stainless steel with easy equipment, it has been long tested and its performance gained a very high reputation from our clients because of its easy operation and smooth work in low failure rate. We can produce the machine under the customer's special requirements. Machine suitable for beverage, such as soy bean, milk, fruit juice, mineral water. And it can automatically do cup setting, filling, photoelectric pattern proofread, sealing, printing date, cutting & discharging.

• Specification 技術參數

Model/型號	BG32A	BG60A	BG32V / BG60V	BG32P / BG60P
Power Source/電源	220V 2.5KW	220V 3.5KW	220V 2.50KW (BG32V) 220V 3.50KW (BG60V)	220V 2.50KW (BG32P) 220V 3.50KW (BG60P)
Capacity/產量	32cups/min	64cups/min	32cups/min (BG32V) 64cups/min (BG60V)	32cups/min (BG32P) 64cups/min (BG60P)
Temperature/溫控範圍	0-300℃	0-300℃	0-300℃	0-300℃
Seal material/封蓋材料	PE PP PE/PET	PE PP PE/PET	Aluminum Foil	PE/ ALUM/PET PE/PET
Dimension/外型尺寸	2150×700×1550mm	2360 × 820×1550mm	2100 × 700×1650mm /2350x800x1650mm	2350 × 700×1650mm /2500x800x1650mm
Weight/重量	400Kgs	500Kgs	500Kgs / 700Kgs	500Kgs/700Kgs



ISO9001 CERTIFICATION

AUTOMATIC CUP FILLING & SEALING MACHINE


全自動杯盒灌裝封蓋機系列



BG32A-1
Automatic cup filling and sealing machine



KIS-900 Rotary type plastic cup filling and sealing machine
旋轉式塑杯灌裝封口機

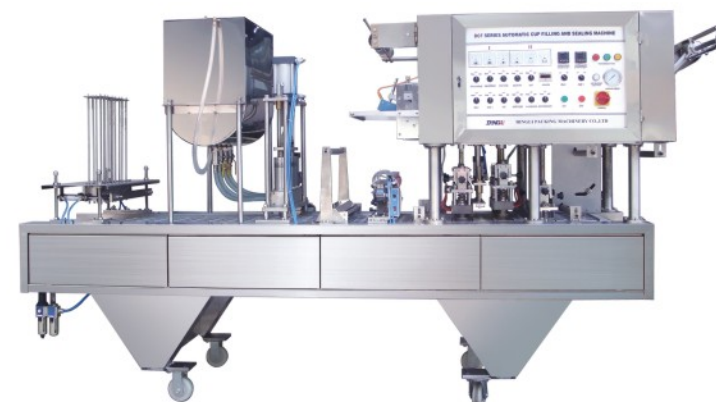

CFD-4 Automatic cup filling and sealing machine (Four cups)
Pneumatic type for big capacity



BG48S Automatic milk Bottles filling and sealing machine
Foil cut-form-seal in one time, save foil device

• Specification 技術參數


Model/型號	BG32A-1	KIS-900	BG48S	CFD-4
Power/功率	220V 3.5KW	220V 2.50KW	220V 2.50KW	380V 3.8KW
Capacity/產量	16cups/min	900cups/Hour	2500bottles/Hour	64cups/min
Temperature/溫控範圍	0-300℃			
Seal material/封蓋材料	PE/ALUM			
Air source/氣壓				0.4m ³ /min, 6bar
Machine size/外形尺寸	2600×800×1700mm	900x750x1750mm	2150×700×1550mm	3300×870×1750mm
Weight/重量	500KGS	210kg	400KGS	800KGS



ISO9001 CERTIFICATION

HOT CODE PRINTER & COLORED MARKING MACHINE SERIES

電動熱打碼機和標示機系列

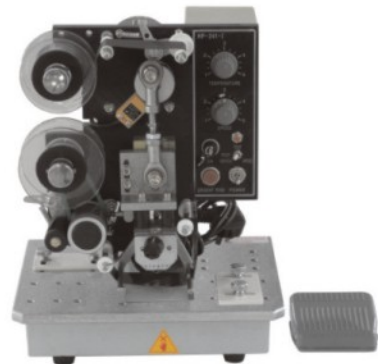


HP-241-I Hot Code Printer
電動熱打碼機




HP-241B Hot Code Printer
電動熱打碼機



DY-8 Hot Code Printer
手動熱打碼機

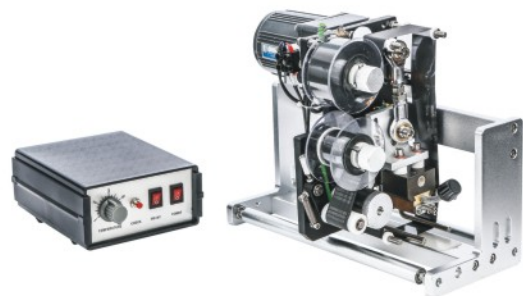

HP-241LD Color ribbon code printer
聯動色帶打碼機

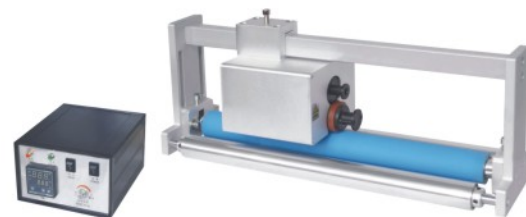

HP-241LD-II Solid-ink code printer
聯動墨輪打碼機




MY-380F Solid-ink coding machine
有色印字標示機



Dry-ink
墨輪



ZE-8B/4 Automatic Paper
Folding Machine



ZE-9B/2 Automatic Paper
Folding Machine

Folding types of model with two folding trays:



Specification 技術參數

Model/型號	MY-380F
Voltage/ 電源電壓	220V/50Hz
Power/功率	300W
Printing speed/印字速度	25M/min
Temperature/溫度	0-300℃
Printing area/印字面積	L:55-500 W:30-170 mm
Weight/重量	24kg
Size(L×W×H)/外形尺寸	480×420×350mm

Specification

Model No.	ZE-8B/4	ZE-9B/2
Voltage (V/Hz)	AC 220/50 110/60	
Power (W)	70	
Folding Tray Number	4	2
Max. Paper Size (mm)	310×700	210×420
Min. Paper Size (mm)	50×70	
Max. Paper Thickness (g)	125	
Min. Paper Thickness (g)	40	
Max. Speed (m/min)	80	
External Dimensions (L×W×H)(mm)	1080×530×580	1020×425×525
Net Weight (kg)	48	30

NO. 43



ISO9001 CERTIFICATION

INJET PRINTER & LASER PRINTER SERIES



DY-X1 Portable inkjet printer
(Max.height of font printed is 12.70mm)



DY-X2 Portable inkjet printer with photosensor
(Available for both manual and on-line,
Max.height of font printed is 12.70mm)



DY-X3 On-line type inkjet printer
(Max.height of font printed is 12.70mm)



DY-Y1 Portable inkjet printer
(Max.height of font printed is 25.40mm)

Option:



Standing shelf



Conveyor



FA300 Paging machine with conveyor
FA300 分页輸送機



TW-HF1020/
TW-HF1030
Fiber laser printer with table



TW-HC1015/
TW-HC1020/
TW-HC1030
CO2 laser printer with table



TW-HF2020/
TW-HF2030 On-Line
Fiber laser printer



TW-HC2015/
TW-HC2020/
TW-HC2030
On-Line CO2 laser printer



NO. 44



SF-1 Portable electrical caper
SF-1 手持式電動旋蓋機



XP-1 Pneumatic Capper
手持式氣動鎖蓋機



DDX-450
Semi-auto capper
半自動鎖蓋機



SC-XG20
Pneumatic turning caper
(for spray-head cap)
氣動旋蓋機 (鴨嘴蓋)



KFJ-1035A
Oral liquid bottle capper
口服液瓶子鎖口機



DFJ-160
Semi-auto can seamer
半自動封罐機



DFS15
Pneumatic aluminium
cap capper
氣動鋁蓋扎口機



JGS-980/JGS-880
Multi-Purpose Locking
And Capping Machine
多功能瓶蓋鎖口機



BZX-4
Glass bottle vacuum
capping machine
玻璃瓶真空旋蓋機

Suitable for various of round tin cans, aluminum cans, paper cans and PET cans, it is an ideal equipment of food & beverage

• Specification技術參數

Model	DY100E
Power supply	220V/380V 50/60Hz 1.1kw
Bottle diameter	35-100mm
Bottle height	50-200mm
Capping speed	30-35 cans/min
Machine size	3000x900x1800mm
Machine weight	480KGS



DY100E Automatic can seamer
全自動封罐機



枕式包裝機



• Specification技術參數

Model/型號	ZSJ-280	ZSJ-320	ZSJ-350	ZSJ-420	ZSJ-500	ZSJ-600
Power/功率	220V,50/60HZ,2.5KW					3.2KW
Packing speed/包裝速度	10-180bag/min				10-150bag/min	
Packing size/包裝尺寸	L60-280,W10-40/40-80 H5-25/25-40	L80-320,W10-40/40-100 H5-30/30-60	L80-320,W30-100 H5-50	L80-320,W30-140 H5-60	L80-350,W30-180 H5-70	L120-999,W30-220 H5-100
Max. width of film/薄膜最大寬度	<280mm	<320mm	<350mm	<420mm	<500mm	<600mm
Thickness of film/薄膜厚度	≥0.02mm					
Packing material/包裝材料	OPP/PP、OPP/CPP、PT/PE、PE、KOP/CPP、PT/PE/、AL/PE etc.					
Weight/重量	500kg	580kg	500kg	600kg	700kg	900kg
Overall size/外形尺寸 (mm)	4790x700x1520	4790x700x1520	4700x800x1550	4700x880x1550	5320x1020x1520	5320x1020x1520

Optional device

- ◆ Full Servo
- ◆ Code printer
- ◆ Gas filling
- ◆ Stainless steel frame



• Specification技術參數

Model/型號	ZSJ-280X	ZSJ-450X
Power/功率	220V,50/60HZ,2.5KW	
Packing speed/包裝速度	30-150bag/min	30-120bag/min
Packing size/包裝尺寸	L60-280 W20-100 H 0-25/25-40	L 100-400 W 80-200 H 0-45/45-75
Max. width of film/薄膜最大寬度	<280mm	<500mm
Thickness of film/薄膜厚度	≥0.02mm	
Packing material/包裝材料	OPP/PP、OPP/CPP、PT/PE、PE、KOP/CPP、PT/PE/、AL/PE etc.	
Weight/重量	500kg	580kg
Overall size/外形尺寸 (mm)	3870x700x1520mm	4800x800x1520mm



膠體磨機系列



JM-60 Vertical colloid grinder
JM-60 立式膠體磨機



JM-80 Vertical colloid grinder
JM-80 立式膠體磨機



JM-120 Vertical colloid grinder
JM-120 立式膠體磨機



JMS50 Split-body colloid grinder
JMS50 分體式膠體磨機



JMS60 Split-body colloid grinder
JMS60 分體式膠體磨機



JMS-80/JMS-120/JMS-130/JMS-150
Split-body colloid grinder
分體式膠體磨機

• Specification 技術參數

Model	JM-60	JM-80	JM-120	JMS-50	JMS-60	JMS-80	JMS-120	JMS-130	JMS-150
Voltage	3Phase 220/380V 50-60HZ								
Power	1.5KW	4KW	7.5KW	0.75KW	1.5KW	4KW	7.5KW	11KW	15KW
Granule precision	2-50 (μm)	2-50 (μm)	2-50 (μm)	2-50 (μm)	2-50 (μm)	2-50 (μm)	2-50 (μm)	2-40 (μm)	
Output	0.05-0.5T/h	0.2-1.5T/h	0.5-2T/h	20-50Kg/h	50-500Kg/h	0.2-1.5T/h	0.5-2T/h	0.5-4T/h	
Weight	45KGS	100KGS	150KGS	35KGS	50KGS	140KGS	200KGS	290KGS	320KGS
Machine size(mm)	300x300x650	450x450x800	550x550x1300	450x205x470	650x255x510	650x300x800	750x380x800	800x400x1000	



Sausage Buttom Machine



Powder Mill



Manual Sausage Stuffer



Electric Sausage Stuffer



Flour mill machine



Crusher



Bone Saw Machine



Planetary Mixer



Semi-automatic cling
film wrapper



Powder Mixer



JS-400 Metal Detector
金屬探測儀



FC-230 Weight Checker
重量選別機



包裝材料



POF Film (C/FOLD)
POF對折膜



PE Shrink Film
PE收縮膜



PVC Shrink Film
PVC收縮膜



Wrapping Film
纏繞膜



Telfon cloth
特氟龍漆布




Strapping Band (PP)
PP捆扎帶



BOPP Cello Tape
封箱膠帶



Cup Sealing Film (PET/CPP)
封杯膜



Aluminum Foil Shim (single/double layer)
鋁箔墊片 (單層/雙層/易撕)



Proform
瓶胚



Cap
瓶蓋



Color Ribbon (3.0/2.5/3.5mm)
色帶 (黑色/白色)



Solid-ink Roller (1.5/3.0cm)
墨輪 (1.5/3.0cm)



Hand Pallet Truck
手動液壓搬運車



PP filter



Alumium tray



Plastic tray



其他產品系列



HW-450 Hand Wrapper
保鮮膜封接機



HW-550 Hand Wrapper
保鮮膜封接機



DZ-300A Household Vacuum Sealer
家用真空包裝機



SF-320 laminator
SF-320 塑封機



DZ-88 Bag Baling Machine
袋口扎帶機



DY-48/DY-75 Manual Tape Dispensor
手動封箱機



TWQ-18 Air Cushion Packager



TWQ-20 Air Cushion Packager
For Column Bag



TDY-300C
Desktop Electric Pad Printer
臺式電動油墨印碼機



Manual code rolling machine
手動滾碼機



Carton printer
紙箱印碼機



Stretch SS roller conveyor
拉伸式不銹鋼滾筒輸送帶



Stretch flange roller conveyor
拉伸式不銹鋼滾筒輸送帶
(帶法蘭倫)



MX-15
Heating mixer(15L)
加熱攪拌罐



MX-50
Heating mixer(50L)
加熱攪拌罐



XBF 500 Blister sealing machine
吸塑包裝封口機



TB390 Skin Packaging Machine
多功能貼體包裝機

* 由于本公司產品不斷改進，本目錄所示之參數隨產品改進有所變更，恕不另行通知。
All specifications designs and characteristics shown on this catalogue are subject to change without prior notice.